




SNOWGUARDS

Standing seam roofs w/ seam mounted guards
Panel runs 35' - 56'

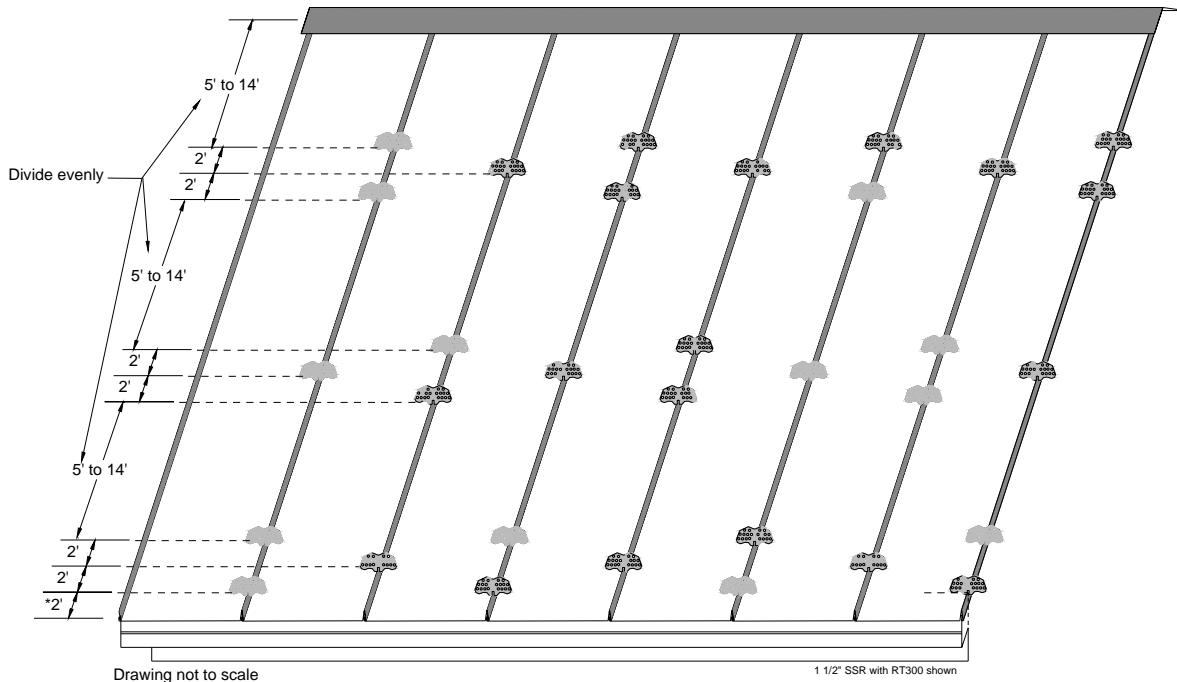

NOTES:

Panel anchor screws (under ridgcap) that fix the panels must be doubled to resist additional loads caused by the snowguards.

The above layout is for standard roof ONLY (as described below)

- Pitch between 2.5/12 and 8/12
- Standard gable roofs only (no sidewalls, endwalls, or roofs above that may add extra snow to this roof plane)
- contact Sentrigard Engineering for non-standard roofs
- Average snowfall areas (ground snow load 30 lb/sq.ft. or below)

*The first row of snowguards must be at or above exterior load bearing wall.

Roof structure should be examined to determine if the additional snow loads are acceptable.

Snow guard patterns provided by Sentrigard are only recommendations. **Actual snow guard patterns should be approved by a licensed architect.**

For more information see Sentrigard Technical Bulletin "404-Condensation and ice damming".